


Manual Call Point With Clear Cover U-711

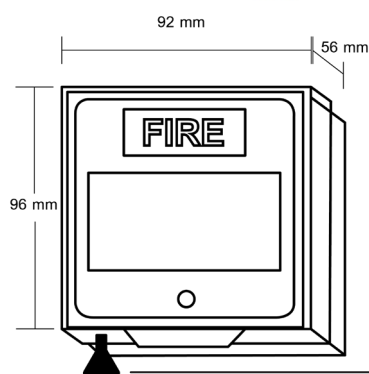

(D)

Features

- Use for 12 - 24 VDC, 220 VAC
- U-711 Manual Call Point RED Color
- Conventional Fire Alarm Accessories
- Break Glass Manual Call Point
- Available in Flush or Surface mounted models.
- Plastic film on glass.
- Test key inserted from bottom
- Transparent cover (Clear Cover)
- Contact one way, Single pole
- Contact two way, Double pole for **Optional**
- 5 colors for **Optional**

Standard

Optional

(A) : Manual Call Point With Clear Cover U-711

Optional

(B) : Manual Call Point With LED Indicating Lamp, Red Color (Made in Local)

(C) : Manual Call Point With With Key Switch (Made in Local)

(D) : Test Manual by Key Test

Specifications

Model	U-711	
Operating voltage	12-24 VDC	220 VAC
Operating current	2A	6A
withstood voltage	250 VAC	
Contact One way	single Pole	
Color	Red	
Weight/ paper Box	180g/ 15g (Spare Parts 5g/ NET 200g)	
Dimension/ Paper Box	96 X 92 X 56 mm/ 105 X 100 X 62 mm	

Diagram for Fire Alarm System, 24 VDC

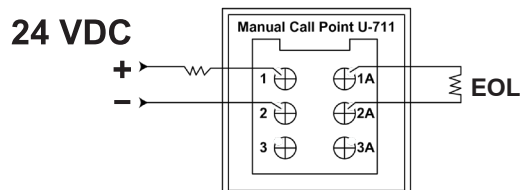


Diagram for 220 VAC

